




DIGIVOX

The complete system for today's public addressing & background music

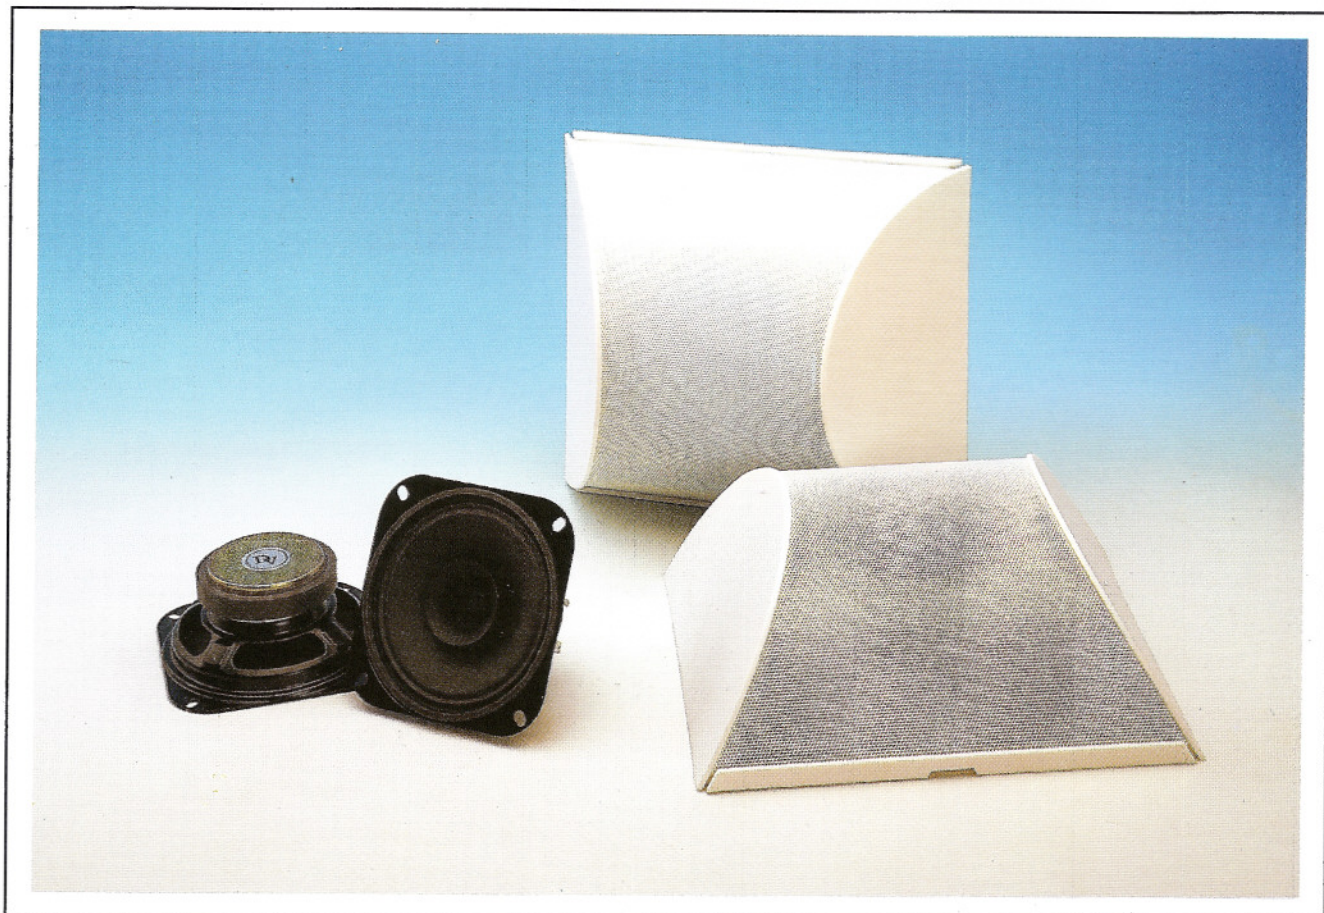

Digivox Surface / Wall Mount Speaker are suitable for any type of sound reproduction, for both paging and background music. With two models available it is used for constant line voltage system (100V line).

FEATURES

- Tough ABS plastic construction
- Clear speech reproduction for paging
- Suitable for background music application
- High efficiency drivers and line transformers

Distributed by :

TECHNICAL SPECIFICATION AND INFORMATION

SURFACE MOUNT SPEAKER

MODEL	DVB 410/T	DVB 420/T
DIAMETER	100mm (4")	100mm (4")
CONE TYPE	DUAL	DUAL
POWER RATING	10W RMS	20W RMS
IMPEDANCE	4 ohm	4 ohm
FREQ. RESPONSE	100 Hz To 18 KHz	80 Hz To 18 KHz
SENSITIVITY @ 1W / 1 METRE	92 dB @ 1 KHz	94 dB @ 1 KHz
MAGNET SIZE	3 oz	5 oz
BAFFLE CONSTRUCTION	ABS	ABS
BAFFLE GRILL	METAL	METAL
BAFFLE COLOUR	OFF WHITE	OFF WHITE
WEIGHT(SPEAKER & ENCLOSURE)	590gm	690gm

MATCHING TRANSFORMER

MODEL	DT-203	DT-204
INPUT VOLTAGE	100V LINE	100V LINE
INPUT IMPEDANCE	3.3K, 6.6K & 10K ohm	1K, 2K & 4K ohm
OUTPUT IMPEDANCE	4 / 8 ohm	4 / 8 ohm
MECHANICAL SIZE (mm)	61 X (L) 34(W) X 36(H)	61(L) X 37(W) X 36(H)
WEIGHT	160gm	195gm

* Specification subject to change without prior notice